

伊 达[®]
YIDA

圣保罗系列

COMPOSITE PVC COILED MATERIAL

复合PVC卷材 ■



Sheet





安装 INSTALLS

应按照当地标准进行安装。铺设地板前，应确保地面平滑、坚硬、清洁和干燥。如有需要，应在地面上铺设一层有效的防潮薄膜。安装地板前，应提前24小时将地板材料放置在18-24℃室温内适应环境。

Installation should be carried out in accordance with local standards. Subfloor to be smooth, hard, clean and dry prior to laying. Where applicable the subfloor must incorporate an effective Damp Proof Membrane. The material must be allowed to acclimatize 24 hours before installation in a room temperature of between 18-24℃.

维护 MAINTENANCE

需使用乳液清洁。定期进行维护以使其保持外观整洁和耐用性。定期清扫和使用中性清洁剂湿擦来维护地板。或者使用具有精细喷雾垫的清洗机进行大面积地面的清洗。

An emulsion dressing is required. maintenance should be carried out regularly to retain the appearance and durability of the floor. The floorcovering should be maintained with regular sweeping and damp mopping using a neutral cleanser, more intense cleaning should be carried out using a fine spray cleaning pad under a floor machine, or for larger areas combined machine cleaning.



YD6353-03 麦牙黄



YD6353-08 烈日黄



YD6353-07 芦苇金



YD6353-04 亚丁褐



YD6353-01 水岸白




YD6353-13 魅光橙



YD6353-12 蜜桃粉




YD6353-16 火鸟红

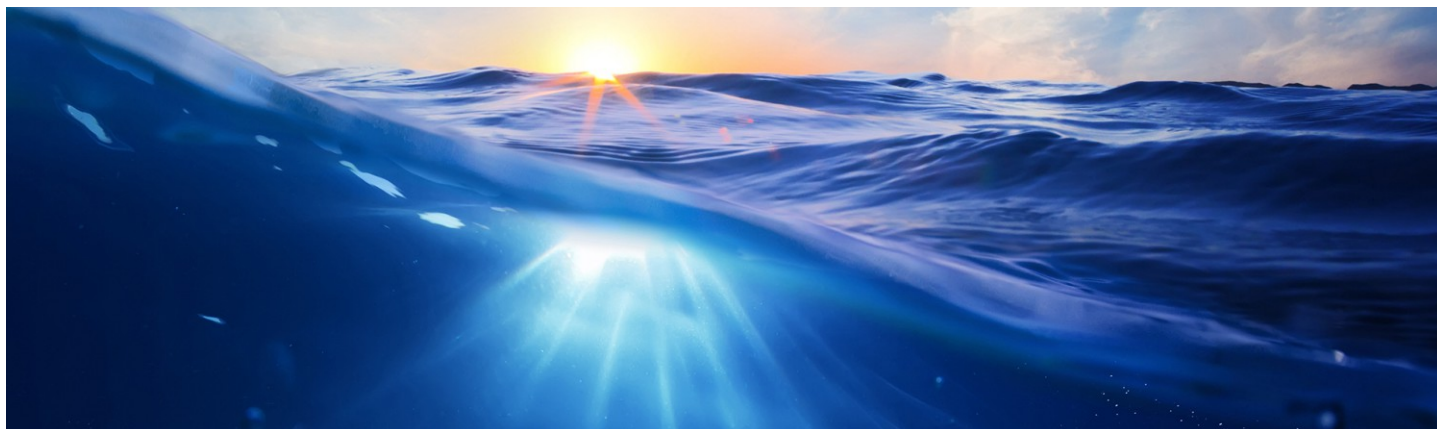

YD6353-06 芳草地



YD6353-09 橄榄绿

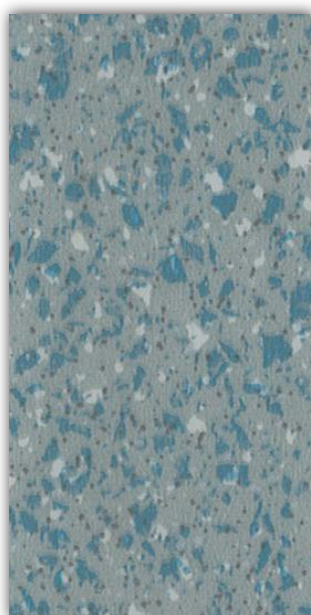

YD6353-05 雪舞蓝



YD6353-11 星空蓝



YD6353-02 云母灰



YD6353-10 极昼灰




YD6353-14 锐利黑



YD6353-15 玛瑙蓝



产品结构 PRODUCT STRUCTURE

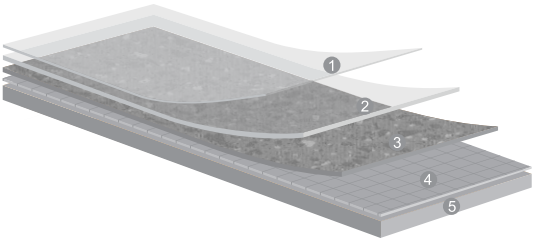

- | | |
|-------------------------------------|------------------------------|
| ① U.V抗菌层
u.v antibacterial layer | ④ 玻璃纤维层
Glass fiber layer |
| ② 耐磨层
Wear layer | ⑤ 致密底层
Dense under layer |
| ③ 印刷层
Printed layer | |



技术参数

TECHNICAL DATE

伊达®
YIDA

复合PVC卷材

检测项目 Test Items	标准 Standard	数值 Result
特别处理 Special Treatment		聚氨酯 (UV)处理
总厚度 Thickness in total	ISO24346-EN 428	2mm
耐磨层厚度 Wear Layer Thickness	ISO23997-EN 429	0.35mm
重量 Weight	ISO23997-EN 430	3200g/m ²
宽度 Width	ISO24341-EN 426	2m
卷长 Length	ISO24341-EN 426	20m
磨损率 Wear Rate	EN 660	T级
防火性 Fire resistance	GB 8624-2012	B ₁ -S1.t0级
受热卷曲度 Heat Crimp	EN 434	优良Great
地热系统 Geothermal		合格 Suitable
耐压性能 Static Indentation	EN 433	0.16
色牢度 Colour fastness	ENISO 105-B02	≥6
抗化学性 Chemical products resistance	EN 423	优良Great
尺寸稳定性 Dimensional stability	En 434	≤0.13%
防滑性能 Slip resistance	DIN 51130	R9
滚轮磨损 Castor chair	EN 425	No Damage
隔音性能 Sound Insulation	EN ISO 717/2	19dB
抗静电性能 Electrical Resistance	EN 1081	≤10 ⁹
抗菌性能 Anti-bacterial	QB/T2591-2003	良好
抗碘酒性能 Anti-iodine Performance	ASTM F925	合格 Qualified
有害物质限量测试 Toxic testing	GB/T 18586-2001	优良Great
欧洲评级 European Ratings	EN 685	商业用：34极高人流量 工业用：43极高人流量

*因产品及标准不断优化,上述数据以最新版样本所标参数为准

