

伊 达<sup>®</sup>  
YIDA

贝加尔系列

COMPOSITE PVC COILED MATERIAL

复合PVC卷材 ■



Sheet





YD-12501



YD-12502



YD-12503



YD-12504



YD-12510



YD-12508



YD-12505



YD-12509



YD-12506



YD-12507





YD-0811



YD-0802




YD-0804



YD-0809



YD-0805

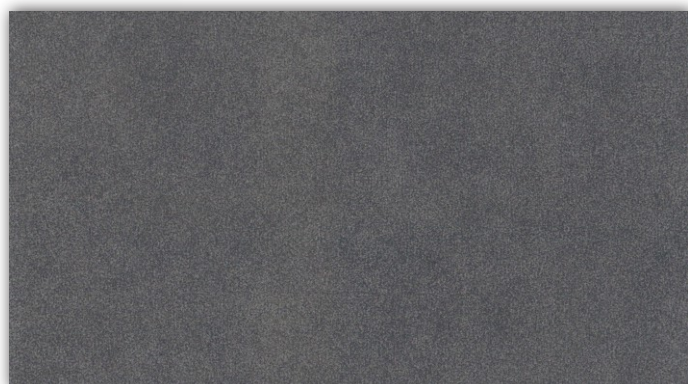

YD-0806



YD-0807




YD-0808



YD-0801




YD-0810

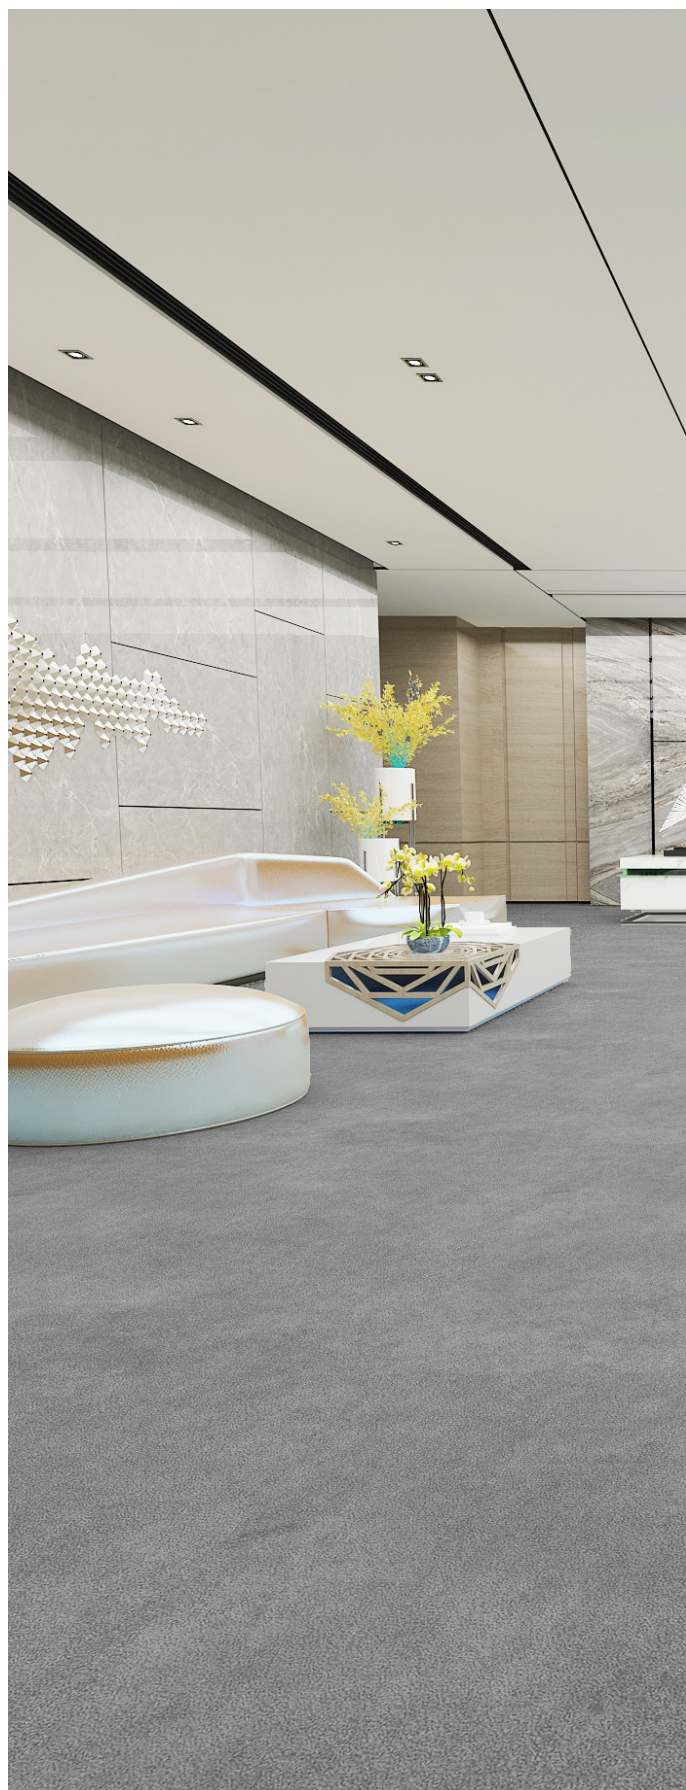



## 产品结构 PRODUCT STRUCTURE

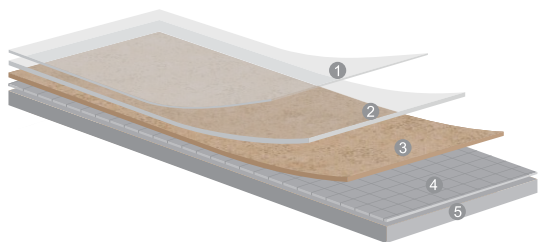

- ① U.V抗菌层  
u.v antibacterial layer
- ② 耐磨层  
Wear layer
- ③ 印刷层  
Printed layer

- ④ 玻璃纤维层  
Glass fiber layer
- ⑤ 致密底层  
Dense under layer

## FEWER VOC,S BETTER INDOOR AIR QUALITY

更低的VOC排放，更好的室内空气质量



### COMPOSITION

• 100%REACH compliant  
成分100%符合REACH法规

- FREE of formaldehyd  
不含甲醛
- FREE of heavy metals  
不含重金属
- FREE of solvent  
不含溶剂



### RECYCLED CONTENT

成份环保

- 100%REACH compliant recycle content  
100%符合REACH规定



### RECYCLABLE

可循环

- 100% recyclable product  
产品100%可回收



### INDOOR AIR QUALITY

室内空气质量

- TVOC emissions 100 times lower than norm requirements(TVOC <10  $\mu\text{g}/\text{m}^3$  after 28 days)  
TVOC排放低于标准100倍 (28天后TVOC排放<10  $\mu\text{g}/\text{m}^3$ )
- No formaldehyde emission  
不含甲醛



### WELLNESS

健康

- Antibacterial activity (inhibits growth>99%)  
有效抑菌(抑菌率>99%)

## 安装 INSTALLS

应按照当地标准进行安装。铺设地板前，应确保地面平滑、坚硬、清洁和干燥。如有需要，应在地面上铺设一层有效的防潮薄膜。安装地板前，应提前24小时将地板材料放置在18-24℃室温内适应环境。

Installation should be carried out in accordance with local standards. Subfloor to be smooth, hard, clean and dry prior to laying. Where applicable the subfloor must incorporate an effective Damp Proof Membrane. The material must be allowed to acclimatize 24 hours before installation in a room temperature of between 18-24°C.

## 维护 MAINTENANCE

需使用乳液清洁。定期进行维护以使其保持外观整洁和耐用性。定期清扫和使用中性清洁剂湿擦来维护地板。或者使用具有精细喷雾垫的清洗机进行大面积地面的清洗。

An emulsion dressing is required. maintenance should be carried out regularly to retain the appearance and durability of the floor. The floorcovering should be maintained with regular sweeping and damp mopping using a neutral cleanser, more intense cleaning should be carried out using a fine spray cleaning pad under a floor machine, or for larger areas combined machine cleaning.



## 技术参数

TECHNICAL DATE

伊达®  
YIDA

复合PVC卷材

| 检测项目 Test Items                   | 标准 Standard     | 数值 Result                  |
|-----------------------------------|-----------------|----------------------------|
| 特别处理 Special Treatment            |                 | 聚氨酯 (UV)处理                 |
| 总厚度 Thickness in total            | ISO24346-EN 428 | 2mm                        |
| 耐磨层厚度 Wear Layer Thickness        | ISO23997-EN 429 | 0.35mm                     |
| 重量 Weight                         | ISO23997-EN 430 | 3200g/m <sup>2</sup>       |
| 宽度 Width                          | ISO24341-EN 426 | 2m                         |
| 卷长 Length                         | ISO24341-EN 426 | 20m                        |
| 磨损率 Wear Rate                     | EN 660          | T级                         |
| 防火性 Fire resistance               | GB 8624-2012    | B <sub>1</sub> S1.t0级      |
| 受热卷曲度 Heat Crimp                  | EN 434          | 优良Great                    |
| 地热系统 Geothermal                   |                 | 合格 Suitable                |
| 耐压性能 Static Indentation           | EN 433          | 0.16                       |
| 色牢度 Colour fastness               | ENISO 105-B02   | ≥6                         |
| 抗化学性 Chemical products resistance | EN 423          | 优良Great                    |
| 尺寸稳定性 Dimensional stability       | En 434          | ≤0.13%                     |
| 防滑性能 Slip resistance              | DIN 51130       | R9                         |
| 滚轮磨损 Castor chair                 | EN 425          | No Damage                  |
| 隔音性能 Sound Insulation             | EN ISO 717/2    | 19dB                       |
| 抗静电性能 Electrical Resistance       | EN 1081         | ≤10 <sup>9</sup>           |
| 抗菌性能 Anti-bacterial               | QB/T2591-2003   | 良好                         |
| 抗碘酒性能 Anti-iodine Performance     | ASTM F925       | 合格 Qualified               |
| 有害物质限量测试 Toxic testing            | GB/T 18586-2001 | 优良Great                    |
| 欧洲评级 European Ratings             | EN 685          | 商业用：34极高人流量<br>工业用：43极高人流量 |

\*因产品及标准不断优化,上述数据以最新版样本所标参数为准

